




-power in control



## DATA SHEET

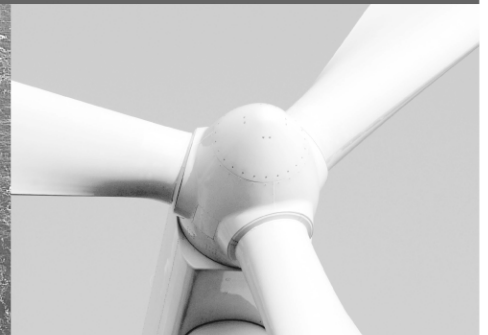

### Multi-transducer, MTR-4

#### Measurement input, auto range

- Up to 1000 V AC L-L
- Up to 12.5 A (sinusoidal)
- 16 to 400 Hz

#### Output

- Up to four analogue outputs
- RS-485 Modbus communication

#### Response time

- $\leq 50$  ms (fast analogue output)
- Data refresh time 50 ms

#### Accuracy, power/U, I

- Analogue output, 0.5/0.4
- Communication, 0.3/0.2

#### Universal auxiliary power

- 24 to 250  $\pm 20$  % V DC
- 48 to 230  $\pm 20$  % V AC

#### Easy programming

- Free utility software M-Set
- By USB, no aux. supply required

#### Commissioning

- Marine approvals from major classification societies



DEIF A/S · Frisenborgvej 33 · DK-7800 Skive  
Tel.: +45 9614 9614 · Fax: +45 9614 9615  
info@deif.com · www.deif.com

Document no.: 4921220061C

**General information**

**Application and overview**

The MTR-4 is intended for measuring and monitoring single-phase or three-phase electrical power network. The MTR-4 measures RMS values by means of fast sampling of voltage and current signals, which makes the instrument suitable for acquisition of transient events. A built-in microcontroller calculates measurements (voltage, current, frequency, energy, power, power factor, THD phase angles, and so on) from the measured signals.

**Features**

- Measurements of instantaneous values of more than 50 quantities (V, A, kW, kVA, kvar, kWh, kvarh, PF, Hz, MD thermal, THD, and so on)
- Power accuracy class 0.5 (0.4)
- Serial communication, RS-485 up to 115,200 bit/s optional
- Modbus communication protocol
- Up to four analogue outputs, and two fast analogue outputs
- Single wide auxiliary power supply range 24 to 250 ±20 % V DC, 48 to 230 ±20 % V AC
- Automatic range of nominal current and voltage (max. 12.5 A and 600 V<sub>L-N</sub>)
- Housing for DIN rail mounting
- User-friendly configuration software

**Standard compliance**

Standard	Description
EN 61010-1	Safety requirements for electrical equipment for measurement, control and laboratory use
EN 60688	Electrical measuring transducers for converting AC electrical variables into analogue and digital signals
EN 61000-6-2	Electromagnetic compatibility (EMC) – Immunity for industrial environments
EN 61000-6-4	Electromagnetic compatibility (EMC) – Emission standard for industrial environments
EN 60 529	Degrees of protection provided by enclosures (IP code)
EN 60 068-2-1/ -2/ -6/ -27/-30	Environmental testing (-1 cold, -2 dry heat, -6 vibration, -27 shock, -30 damp heat)
UL 94	Tests for flammability of plastic materials for parts in devices and appliances

**Application**

The MTR-4 multi-function transducer is used for measuring and monitoring all single-phase or three-phase values. The range of I/O modules makes MTR-4 a perfect choice for numerous applications. MTR-4 supports standard serial communication RS-485 with speed up to 115,200 baud, which is perfect for simple applications and serial bus interfacing.

Additional USB 2.0 interface can be used for a fast setup without need for auxiliary power supply. This interface is NOT galvanically separated from power input and can be used ONLY unconnected to power inputs.

**Programming**

The MTR-4 multi-function transducer is completely programmable by M-Set utility software.

Primary-secondary ratio (U, I), energy counter, input and output values are all programmed by setting software on the USB or the RS-485 communication.

It is possible to choose between several standard output value ranges (100 to 0 to 100 %):

- 10 to 0 to 10 V,
- 1 to 0 to 1 V,
- 20 to 0 to 20 mA,
- 10 to 0 to 10 mA,
- 5 to 0 to 5 mA,
- 1 to 0 to 1 mA,.

Within these six ranges, it is possible to set any linear or bent (with maximum 5 break points) output characteristic.

## Technical information

## Technical data

Accuracy			
Measured values	Range		Accuracy class*
Rms current (I1, I2, I3, Iavg, In)	-1/-5 A		0.4 (0.2)**
Maximum current	12.5 A		0.4 (0.2)**
Rms phase voltage (U1, U2, U3, Uavg)	62.5, 125, 250, 500 V <sub>L-N</sub>		0.4 (0.2)**
Maximum voltage	600 V <sub>L-N</sub>		0.4 (0.2)**
Rms phase-to-phase voltage (U12, U23, U31, Uavg)	800 V <sub>L-L</sub>		0.4 (0.2)**
Frequency (f) – actual	50/60 Hz		0.02
Nominal frequency range	16 to 400 Hz		0.02
Power angle ( $\varphi$ )	-180 to 0 to 180°		0.2°
Power factor (PF)	-1 to 0 to +1		
	U = 50 to 120 % U <sub>n</sub>		0.5
	I = 2 % to 20 % I <sub>n</sub>		0.2
THD	5 to 500 V		0.5
	0 to 400 %		
Active power	75	375	0.5 (0.3)**
Reactive power	120	600	
	Apparent power	250	1250
500		2500	
[W/var/VA]		[W/var/VA]	0.5 (0.3)**
	I <sub>n</sub> = 1 A	I <sub>n</sub> = 5 A	
Active energy			Class 1
Reactive energy			Class 2

\* All measurements are calculated with high harmonic signals.

\*\* Accuracy on RS-485 Modbus values.

Inputs		
<b>Voltage inputs</b>	Nominal range values	62.5, 125, 250, 500 V <sub>LN</sub> - Auto range
	Nominal voltage (U <sub>N</sub> )	500 V <sub>LN</sub>
	Measuring range (cont.)	2 to 600 V <sub>LN</sub> (1000 V <sub>LL</sub> ) sinusoidal
	Max. allowed value acc. to IEC/EN 60 688	2 × U <sub>N</sub> ; 1 sec, 10 times and 10 sec interval
	Frequency range	50/60, 400 Hz*
	Consumption	< U <sup>2</sup> /3.3 MΩ per phase
	Input impedance	3.3 MΩ per phase
<b>Current inputs</b>	Nominal range values	1, 5, 10 A – Auto range
	Nominal current (I <sub>N</sub> )	5 A
	Measuring range	1 mA to 12.5 A sinusoidal
	Min. measurement (noise reduction)	Settings from “ <b>starting current for all powers</b> ”***
	Max. allowed value (thermal)	15 A cont.
	acc. to IEC/EN 60 688	20 × I <sub>N</sub> ; 5 × 1s ; 300 ms interval
	Frequency range	50/60, 400 Hz*
	Consumption	< I <sup>2</sup> × 0.01 Ω per phase
<b>Frequency</b>	Nominal frequency (f <sub>N</sub> )	50, 60 Hz
	Measuring range	16 to 400 Hz***
<b>Power Supply Universal</b>	Nominal voltage AC	48 to 230 V ±20 %
	Nominal frequency	45 to 65 Hz
	Nominal voltage DC	24 to 250 V ±20 %
	Consumption	< 8 VA
	Power-on transient	< 20 A; 1 ms

\* MTR-4 for 400 Hz voltage/current measurements needs to be calibrated, available by special request.

\*\* Starting current is set by setting software M-Set/settings/general

\*\*\* For frequency measurement only

Analogue outputs		
<b>Analogue output</b>  <b>General</b>	Linearisation	Linear, quadratic
	No. of break points	5
	Output value limits	$\pm 120$ % of nominal output
	Response time	$\leq 50$ ms
	Residual ripple	$< 1$ % p.p. (only for standard output)
<b>DC Current</b>  <b>Output</b>	Output range values	-100 to 0 to 100 %
	-1 to 0 to 1 mA	Range 1
	-5 to 0 to 5 mA	Range 2
	-10 to 0 to 10 mA	Range 3
	-20 to 0 to 20 mA	Range 4
	Other ranges	possible by M-Set software
	Burden voltage	10 V
	External resistance	$RB_{\max} = 10 \text{ V}/I_{\text{outN}}$
<b>DC Voltage</b>  <b>Output</b>	Output range values	-100 to 0 to 100 %
	-1 to 0 to 1 V	Range 5
	-10 to 0 to 10 V	Range 6
	Other ranges	possible by M-Set software
	Burden current	20 mA
	External resistance	$RB_{\min} = U_{\text{outN}}/20 \text{ mA}$

**Connection**

**Permitted conductor cross-sections**

<b>Terminals</b>	<b>Max. conductor cross-sections</b>
<b>Voltage inputs (4)</b>	2.5 mm <sup>2</sup> with pin terminal
	4 mm <sup>2</sup> solid wire
<b>Current inputs (6)</b>	2.5 mm <sup>2</sup> with pin terminal
	4 mm <sup>2</sup> solid wire
<b>Power supply (2)</b>	2.5 mm <sup>2</sup> with pin terminal
	4 mm <sup>2</sup> solid wire
<b>Analogue outputs (0/4/6/8)</b>	2.5 mm <sup>2</sup> with pin terminal
	4 mm <sup>2</sup> solid wire

**Communication**

<b>Type</b>	RS-485	USB
<b>Type of connection</b>	Network	Direct
<b>Max. connection length</b>	1000 m	3 m
<b>Number of bus stations</b>	≤ 32	-
<b>Terminals</b>	Screw terminals	USB-mini
<b>Insulation</b>	Protection class I, 3.3 kV AC RMS 1 min	No insulation!
<b>Transfer mode</b>	Asynchronous	
<b>Protocol</b>	Modbus RTU	
<b>Transfer rate</b>	2,400 to 115,200 bit/s	USB 2.0

**Electronic features**


<b>Response time input→ communication</b>	All calculations are averaged over an interval of between 8 to 256 periods. Preset interval is 64 periods, which is 1.28 second at 50 Hz.  Modbus table refresh time: 50 ms
<b>Status LEDs PWR</b>	Red = instrument power ON

<b>Safety features</b>	
<b>Protection</b>	IP20 acc. to IEC/EN 60529
	Protection class II
<b>Pollution degree</b>	2
<b>Installation category</b>	CAT III; 600 V meas. inputs acc. to EN 61010-1
	CAT III; 300 V aux. supply acc. to EN 61010-1
<b>Galvanic isolation Acc. to EN 61010-1</b>	UAUX↔AO, COM: 3310 V AC, 50 Hz, 60 sec.
	UAUX↔U, I inputs: 3310 V AC, 50 Hz, 60 sec.
	U in↔AO, COM: 3310 V AC, 50Hz, 60sec
	I in↔AO, COM: 2210V AC, 50Hz, 60sec
	U in↔I in: 3310 V AC, 50, 60 sec.

<b>Mechanical</b>	
<b>Dimensions</b>	W100 × H75× D105 mm
<b>Max. conductor cross section for terminals</b>	2.5 mm <sup>2</sup> stranded wire
	4 mm <sup>2</sup> solid wire
<b>Vibration</b>	IEC 60068-2-6, 3 to 13.2 Hz: 2mmpp. 13.2 to 100 Hz: 0.7 g. To IEC 60068-2-6 & IACS UR E10
<b>Shock</b>	IEC 60068-2-27, 50 g, 11 ms, half sine. To IEC 60068-2-27
<b>EMC</b>	Acc. to EN 61000-6-2 and EN 61000-6-4
<b>Mounting</b>	Rail mounting 35 × 15 mm
	acc. to DIN EN 50 022
<b>Enclosure material</b>	PC/ABS
<b>Flammability</b>	Acc. to UL 94 V-0
<b>Weight</b>	370 g

<b>Ambient conditions</b>	
<b>Ambient temperature</b>	usage group I
	-5 to 0 to 45 to 55 °C (Accuracy outside reference temperature range is not more than 2x class)
	Acc. to IEC/EN 60 688
<b>Operating temperature</b>	-30 to +70 °C
<b>Storage temperature</b>	-40 to +70 °C
<b>Average annual humidity</b>	≤ 93 % r.h.

Unit dimensions

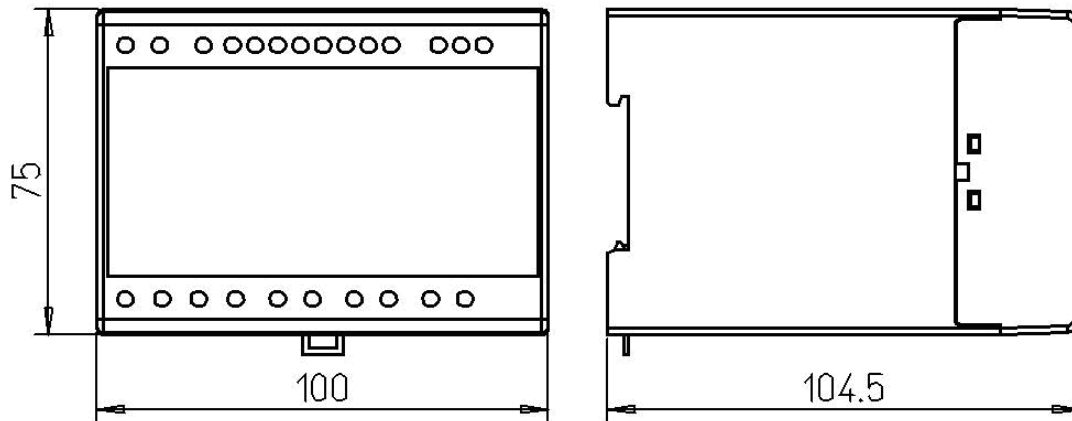

Dimensions are given in mm.

Order specifications

Name	Output				RS 485	DEIF no.	EAN no.
	1	2	3	4			
MTR-4-015					X	1200510020	5703727116188
MTR-4-105	AO					1200510021	5703727116195
MTR-4-215	AO	AO			X	1200510022	5703727116201
MTR-4-315	AO	AO	AO		X	1200510023	5703727116218
MTR-4-415	AO	AO	AO	AO	X	1200510024	5703727116225

Disclaimer

DEIF A/S reserves the right to change any of the contents of this document without prior notice.

The English version of this document always contains the most recent and up-to-date information about the product. DEIF does not take responsibility for the accuracy of translations, and translations might not be updated at the same time as the English document. If there is a discrepancy, the English version prevails.

Due to our continuous development we reserve the right to supply equipment which may vary from the described.



DEIF A/S, Frisenborgvej 33  
DK-7800 Skive, Denmark

Tel.: +45 9614 9614, Fax: +45 9614 9615  
E-mail: deif@deif.com, URL: www.deif.com

